



Fall Protection

Technical data sheet

1112711 / 1112712 / 1112713

# 3M™ DBI-SALA® ExoFit™ XE50 Safety Harness with quick connect buckles

## Part number(s):

1112711 (Size 1)

1112712 (Size 2)

1112713 (Size 3)

## Description

<b>Sub-brand:</b>	DBI-SALA®
<b>Industry:</b>	Construction, General Industrial, General Manufacturing, Transportation
<b>Applications:</b>	Climbing

## Features

<b>Rear fall arrest attachment point:</b>	<ul style="list-style-type: none"><li>• Large D-ring</li><li>– Steel - zinc plated</li></ul>
<b>Front fall arrest attachment point:</b>	<ul style="list-style-type: none"><li>• Standard D-ring</li><li>– Steel - zinc plated</li></ul>
<b>Leg Buckles:</b>	<ul style="list-style-type: none"><li>• Quick connect</li><li>– Steel - zinc plated/black paint</li></ul>
<b>Chest Buckles:</b>	<ul style="list-style-type: none"><li>• Quick connect</li><li>– Steel - zinc plated/black paint, aluminium - grey anodisation</li></ul>
<b>Adjustment:</b>	<ul style="list-style-type: none"><li>• Legs, torso</li><li>• Torso: Revolving adjuster</li><li>– Steel/aluminium - ratchet buckle</li></ul>
<b>Webbing:</b>	45mm Polyester
<b>Thread:</b>	Polyester
<b>Additional features:</b>	<ul style="list-style-type: none"><li>• Front &amp; rear fall indicators</li><li>• 2x Auto-resetting/repositionable lanyard keepers</li><li>• RFID Equipped</li><li>• Suspension trauma straps</li><li>• Dedicated personal self-retracting lifeline attachment point</li></ul>
<b>Weight capacity:</b>	140 kg
<b>Standards:</b>	<ul style="list-style-type: none"><li>• CE EN361:2002</li><li>• UKCA</li></ul>



Front




Back

Version: 1

This version is the sole document applicable to the product(s) since its date of publication

## 3M™ DBI-SALA® Fall Arrest Harness sizing chart

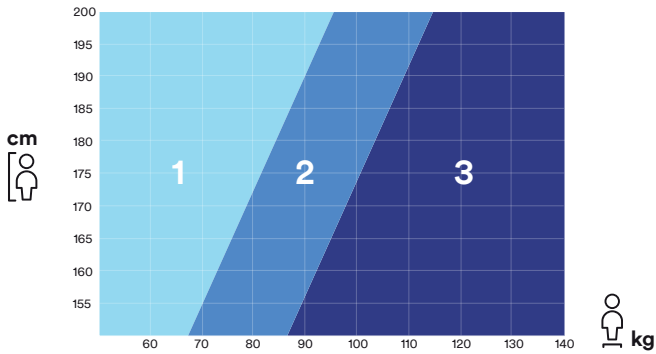

## Weight

	←.....→	kg
1112711	Size 1	1.65
1112712	Size 2	1.70
1112713	Size 3	1.75

## Important notice

The mounting and use of the product described within this document assumes that the user has previous experience of this type of product and that it will be assembled by a competent professional according to product documentation. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.

Compliance to the information and specification relative to the product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. The 3M Group (who cannot verify or control these elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control.

Warranty conditions for products are determined with the sales contract documents and with the mandatory and applicable law, excluding any other warranty or compensation.

### 3M Fall Protection

**Capital Safety (Northern Europe) Limited**  
3M Centre, Cain Road  
Bracknell, Berkshire, RG12 8HT, UK

**Capital Safety Group (EMEA)**  
Le Broc Center, Bâtiment A, Z.1. 1re Avenue – BP15  
06511 Carros Le Broc, Cedex, FRANCE

Phone +33(0) 4 83 58 08 08 Email [informationfallprotection@mmm.com](mailto:informationfallprotection@mmm.com) Web [3M.com/FallProtection](http://3M.com/FallProtection)

3M, DBI-SALA, ExoFit, Scotchlite, belongs to 3M Company and its affiliates.



Fall Protection