



USER INSTRUCTIONS

Information

The Micron is a single use emergency evacuation descender with integrated rope.

Available as a kit in various lengths: WK46XXX, where XXX is the length of rope.

This product is guaranteed for three years against faults arising from manufacturing errors or materials defects. This guarantee does not include normal wear and tear, faults arising from uses for which the product was not designed and accidental damage.

Compatibility


Harness should conform to EN358, EN813, or EN1498 class B. Use the correct attachment point for the correct purpose. Suitable locking connectors conforming to the relevant EN standards should be used and correctly fastened. Beware of loading karabiners across the gate. Check that connectors are correctly fastened during use.

These requirements must be adhered to.

Quick release option

Connect to harness with karabiner as above. Pull yellow toggle to unlock. Pull blue toggle to release.

Pull down on handle

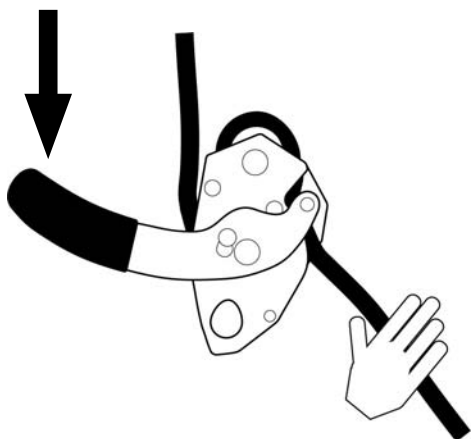

Use

Connect the rope end to a suitable anchor point which should ideally conform to EN795 (see requirements on next page) directly or with sling supplied, making sure it is positioned so that the descent path is not obstructed.


Ensure that anchor points have a minimum strength of 15kN and that anchor stops will not slide down the structure when load is applied.

Connect the descender to the front attachment point of your harness with a suitable locking karabiner. Clip the bag to your harness. Adjust the rope by pulling through the descender so that there is no slack between the anchor point and the device. Hold the tail rope firmly, gently pull down on the handle and begin your descent.

As the handle is moved the rope will start to pass through the device. Further movement of the handle will increase the speed of the descent until the secondary braking system comes into effect. Friction will then increase, slowing the passage of the rope. If the handle is pulled even harder descent will stop.

Markings

Conformity: EN341: 1993 type D
 - type D specifies that the device is for single use only
 Max descent XXXm
 - where XXXm is the length of supplied rope up to a maximum of 120m.
 Max descent load 125kg

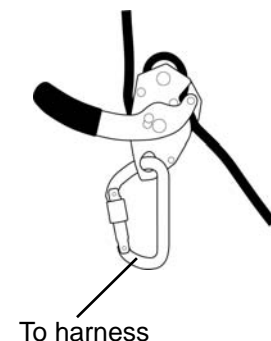

To harness

Warnings

- Beware of rope running over sharp edges and abrasive surfaces, or coming into contact with hot surfaces or flame.
- Anchor points must meet the requirements given overleaf.
- During use, take care that hair or clothing do not feed into the descender.
- This device is designed for single use only. Once used, destroy by cutting the rope and removing it from the descender.
- Protect the rope from exposure to sunlight, as UV degradation can affect strength.
- Do not use this product outside its limitations, or for any purpose other than that recommended above. Do not alter or make additions to this product.

