

Products, training and operational support services for professional work at height and rescue

LASER horizontal anchor line 10m

LH10

Tensioned horizontal 13mm rope to provide a temporary anchor point for two people.

13mm kernmantel rope.
Stainless steel tensioning unit.
Easy to adjust and release.
Designed to dissipate the energy from a fall with no damage to rope or adjuster.
Suitable for restraint or fall arrest.


No intermediate anchor points required.

The Laser horizontal line is certified for use by two users simultaneously.

If access is required over a large area a Piranha adjustable lanyard can be attached to the Laser allowing independent adjustment of the users position in two perpendicular directions.

Available in 2 lengths:

LH10 - 10m
LH18 - 18m

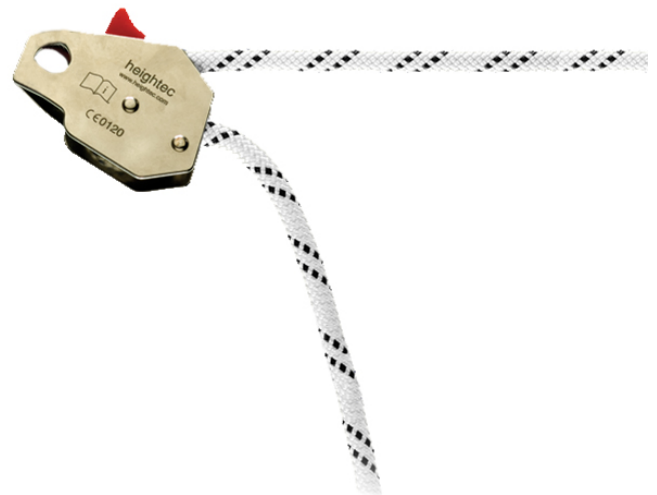

Specifications:

Size:	10m
Materials:	Nylon and stainless steel
EN test Mass:	
Loading:	2 persons. 250 kg (125 x 2)
Weight (kg):	
Conformity:	EN795(C)
Markets:	Rope access, roof safety, utilities, telecoms and fall arrest

Specifications may change without notice.