



# 3M™ Protecta® Standard Vest Style Fall Arrest Rescue Harness with 2 Attachment Points

## Part number(s):

1161613 Medium / Large (M/L)

1161612 Small (S)

1161614 Extra Large (XL)

## Description

<b>Sub-brand:</b>	Protecta®
<b>Industry:</b>	Construction, General Industry, Utility, Mining, Transportation, General Manufacturing
<b>Applications:</b>	Fall Arrest, Vertical Ladder Climbing, Confined Space/Rescue

## Features

<b>Rear fall arrest attachment point:</b>	<ul style="list-style-type: none"><li>• Large D-ring<ul style="list-style-type: none"><li>– Steel - zinc plated black electro-deposition paint</li></ul></li></ul>
<b>Front fall arrest attachment point:</b>	<ul style="list-style-type: none"><li>• Standard D-ring<ul style="list-style-type: none"><li>– Steel - zinc plated black electro-deposition paint</li></ul></li></ul>
<b>Rescue attachment point:</b>	<ul style="list-style-type: none"><li>• Shoulder sling with D-ring<ul style="list-style-type: none"><li>– Steel - zinc plated black electro-deposition paint</li></ul></li></ul>
<b>Buckles:</b>	<ul style="list-style-type: none"><li>• Pass-through buckles</li></ul>
<b>Adjustment:</b>	<ul style="list-style-type: none"><li>• Torso, legs</li><li>• Torso: Spring adjuster<ul style="list-style-type: none"><li>– Steel - zinc plated black electro-deposition paint</li></ul></li></ul>
<b>Webbing:</b>	45 mm polyester - water & dirt resistant
<b>Thread:</b>	Polyester
<b>Additional features:</b>	<ul style="list-style-type: none"><li>• Front &amp; rear fall indicators</li><li>• Auto-resetting lanyard keeper</li><li>• Hook and loop web ends</li><li>• Protected labels</li></ul>
<b>Weight capacity:</b>	140 kg
<b>Operating temperature:</b>	-35°C +57°C
<b>Standards:</b>	CE EN361:2002; EN1497:2007




Front



Back

## 3M Protecta® Fall Arrest Harness sizing chart

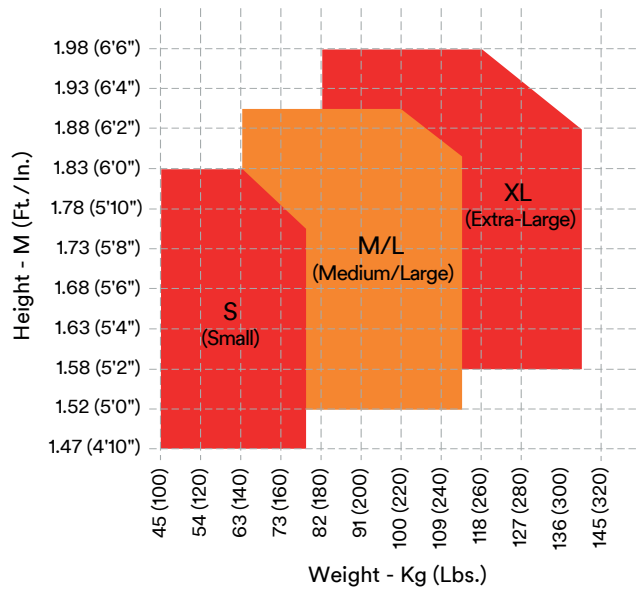

## Weight

	←.....→	⚖️ kg
1161612	Small (S)	1.24
1161613	Medium / Large (M/L)	1.29
1161614	X-Large (XL)	1.34

## Important notice

The mounting and use of the product described within this document assumes that the user has previous experience of this type of product and that it will be assembled by a competent professional according to product documentation. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.

Compliance to the information and specification relative to the product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. The 3M Group (who cannot verify or control these elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control.

Warranty conditions for products are determined with the sales contract documents and with the mandatory and applicable law, excluding any other warranty or compensation.

### 3M Fall Protection

Capital Safety (Northern Europe) Limited  
3M Centre, Cain Road  
Bracknell, Berkshire, RG12 8HT, UK

Capital Safety Group (EMEA)  
Le Broc Center, Bâtiment A, Z.1. 1re Avenue – BP15  
06511 Carros Le Broc, Cedex, FRANCE

Phone 00 800 999 55500 Email [informationfallprotection@mmm.com](mailto:informationfallprotection@mmm.com) Web [3M.com/FallProtection](http://3M.com/FallProtection)

3M, Protecta, belongs to 3M Company and its affiliates. J435647



Fall Protection